


## HUB-COMPATIBLE BLAST DEFLECTION

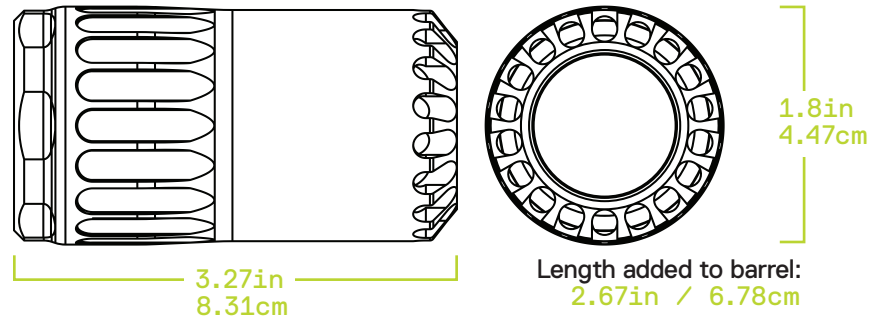

### PRODUCT SPECIFICATIONS

<b>Weight</b>	6.9oz / 195g
<b>Caliber</b>	Up to .338
<b>Materials</b>	17-4 Heat Treated Stainless Steel
<b>Coating</b>	C-Series Cerakote™ Matte Black

<b>Technology Readiness</b>	TR Level 9 Fully developed, in production.
<b>Mounts</b>	QD HUB compatible
<b>Barrel Length</b>	No restrictions.
<b>Durability</b>	Exceeds 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
<b>Maintenance</b>	Occasional cleaning with attention to threads can help to maintain product performance.

### WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit [www.huxwrx.com/warranty](http://www.huxwrx.com/warranty).