


# FLOW 9k Ti


PISTOL



## SUPERIOR PISTOL CALIBER PERFORMANCE

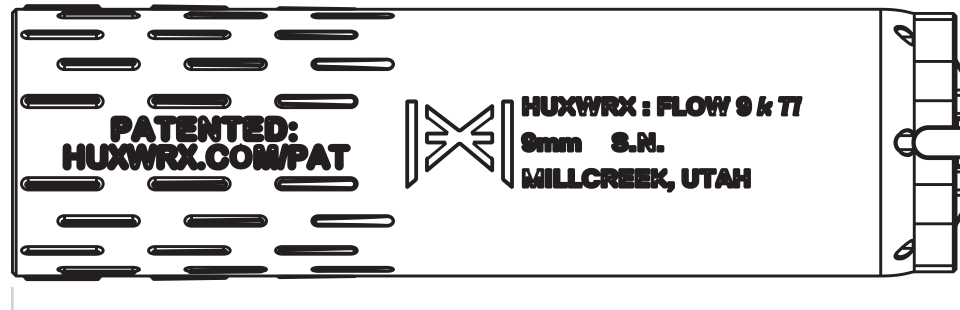

5.33in / 13.5cm,  
5.87in / 14.9cm with included booster assembly



1.47in  
3.73cm

Length added to barrel:  
5.25in / 13.3cm with  
included booster assembly

### PRODUCT SPECIFICATIONS

<b>WEIGHT</b>	4.8oz / 136g – 8.9oz / 252g with included booster assembly
<b>CALIBER</b>	9mm, 22 LR, 17 HMR, 5.7, 300 BO Subsonic & Supersonic, 350 Legend
<b>MATERIALS</b>	Suppressor: Grade 5 Titanium Booster Assembly: 17-4 Heat Treated Stainless Steel & 7075-T6 Aluminum
<b>COATINGS</b>	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) Booster Assembly: DLC/Black Nitride
<b>TECHNOLOGY READINESS</b>	TR Level 9 Fully developed, in production.
<b>MOUNTS</b>	Ships with ½ × 28 booster assembly; 3-LUG, HUB, stiction, and direct thread adapters available.
<b>BARREL LENGTH</b>	No restrictions
<b>DURABILITY</b>	Full-auto rated for 300 BO.
<b>MAINTENANCE</b>	Detailed cleaning should be performed every 2,000 rounds.

### WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit [www.huxwrx.com/warranty](http://www.huxwrx.com/warranty).