


FLOW RANGE 36 Ti


RIFLE



EXPAND YOUR RANGE

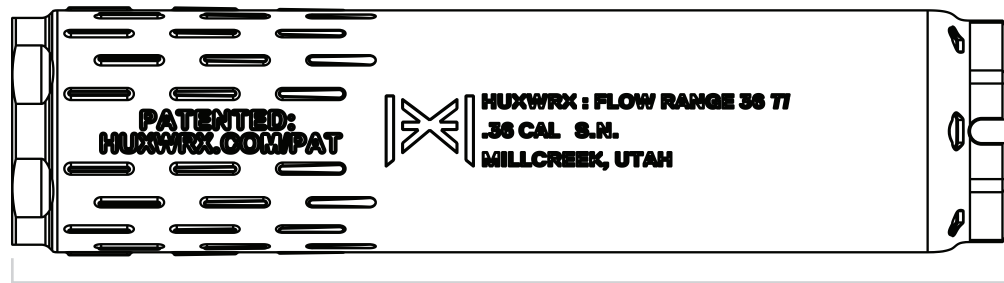

6.67in / 16.9cm,
7.54in / 19.2cm with included HUB QD adapter



Length added to barrel:
6.92in / 17.6cm with
included HUB QD adapter

PRODUCT SPECIFICATIONS

WEIGHT	8.4oz / 238g – 12oz / 340g with included HUB QD adapter
CALIBER	Pistol calibers up to 9mm; Rifle calibers 17 HMR-.338 Lapua, .338 arc, 8.6 blkout
MATERIALS	Suppressor: Grade 5 Titanium HUB QD adapter: 17-4 Heat Treated Stainless Steel
COATINGS	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) HUB QD adapter: DLC/Black Nitride
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with HUB QD adapter; 3-LUG, HUB, stiction, and direct thread adapters available.
BARREL LENGTH	No restrictions
DURABILITY	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
MAINTENANCE	Detailed cleaning should be performed every 2,000 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit www.huxwrx.com/warranty.

