



# FLOW RANGE 36 Ti

RIFLE



## EXPAND YOUR RANGE

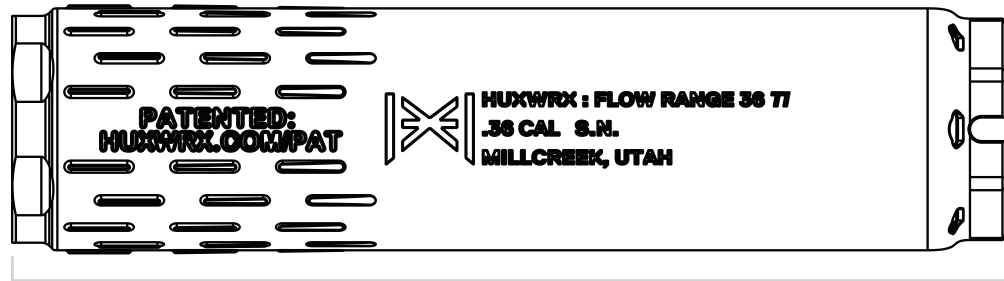

1.6in  
4.06cm

Length added to barrel:  
6.92in / 17.6cm with  
included HUB QD adapter

6.67in / 16.9cm,  
7.54in / 19.2cm with included HUB QD adapter

### PRODUCT SPECIFICATIONS

<b>WEIGHT</b>	8.4oz / 238g – 12oz / 340g with included HUB QD adapter
<b>CALIBER</b>	Pistol calibers up to 9mm; Rifle calibers 17 HMR-.338 Lapua, .338 arc, 8.6 blkout
<b>MATERIALS</b>	Suppressor: Grade 5 Titanium HUB QD adapter: 17-4 Heat Treated Stainless Steel
<b>COATINGS</b>	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) HUB QD adapter: DLC/Black Nitride
<b>TECHNOLOGY READINESS</b>	TR Level 9 Fully developed, in production.
<b>MOUNTS</b>	Ships with HUB QD adapter; 3-LUG, HUB, stiction, and direct thread adapters available.
<b>BARREL LENGTH</b>	No restrictions
<b>DURABILITY</b>	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
<b>MAINTENANCE</b>	Detailed cleaning should be performed every 2,000 rounds.

### WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. For more information, visit [www.huxwrx.com/warranty](http://www.huxwrx.com/warranty).

