


FLOW 9 M

PISTOL



LIGHTWEIGHT AND MODULAR

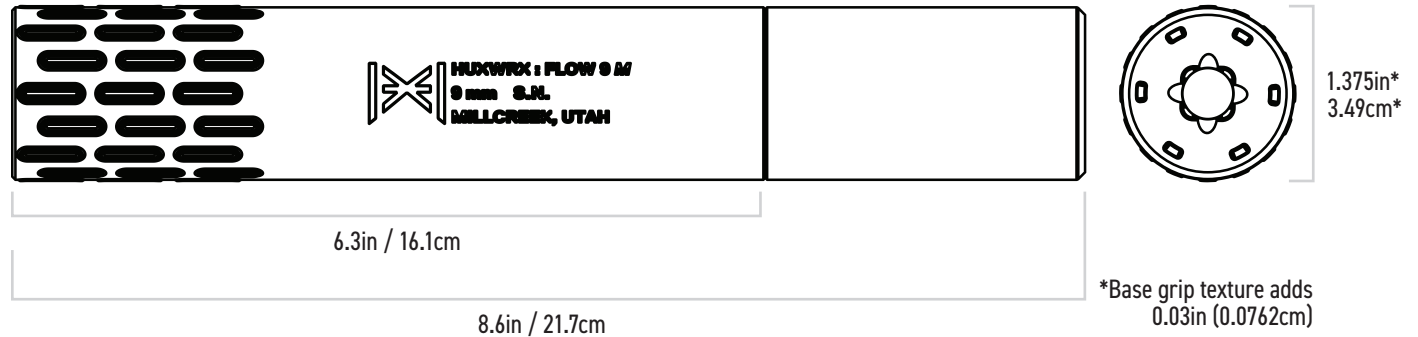

PRODUCT SPECIFICATIONS

LENGTH ADDED TO BARREL	With included Booster Assembly, 6.3in / 16.1cm in short configuration 8.6in / 21.7cm in long configuration
WEIGHT	6.3oz / 178g in short configuration – (8.3oz / 237g with included booster assembly) 8.5oz / 240g in long configuration – (10.5oz / 299g with included booster assembly)
CALIBER	9mm, 22 LR, 17 HMR, 5.7, 300 BO Subsonic, 350 Legend
MATERIALS	Grade 23 Titanium
COATINGS	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) Booster Assembly: DLC/Black Nitride
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with ½ × 28 booster assembly (3-LUG, stiction, and direct thread adapters available)
MAINTENANCE	Detailed cleaning should be performed every 1,000 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. For more information, visit www.huxwrx.com/warranty.