


FLOW 9k PCC

PISTOL CALIBER CARBINE




BUILT FOR PCCs

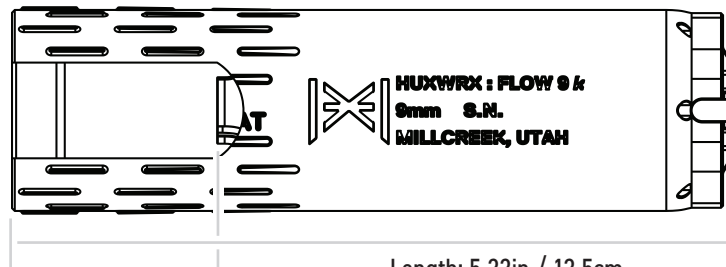

Length: 5.33in / 13.5cm,

Distance to first baffle: 5.6in / 14.1cm with included direct thread adapter
1.5in / 3.8cm



1.47in*
3.73cm*

*Base grip texture adds
0.05in (0.127cm)

PRODUCT SPECIFICATIONS

LENGTH ADDED TO BARREL	4.9in / 12.4cm with included direct thread adapter
WEIGHT	8.5oz / 239g – (10.3oz / 293g with included direct thread adapter)
CALIBER	9mm, 22 LR, 17 HMR, 5.7, 300 BO Subsonic & Supersonic, 350 Legend
MATERIALS	Suppressor: 17-4 Heat Treated Stainless Steel Direct thread adapter: 17-4 Heat Treated Stainless Steel
COATINGS	Suppressor: C-Series Cerakote™ Matte Black (Flat Dark Earth available) Direct thread adapter: Black Nitride
TECHNOLOGY READINESS	TR Level 9 Fully developed, in production.
MOUNTS	Ships with 1/2×28 direct thread adapter (Booster assembly, 3-LUG, HUB, stiction, and other direct thread adapters available)
BARREL LENGTH	No restrictions
MAINTENANCE	Detailed cleaning should be performed every 1,000 rounds.

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. For more information, visit www.huxwrx.com/warranty.