
## VENTUM 556





### **ENGINEERED WITH PURPOSE**

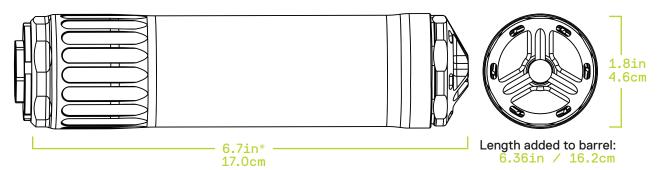

#### **PRODUCT SPECIFICATIONS**

Weight	15.2oz / 431g*	Technology Readiness	TR Level 9 Fully developed, in production.
Caliber	5.56, .223, 17 HMR, 5.7, 22 LR, 5.45	Mounts	Direct thread 1/2 x 28
<b>Bolt Velocity</b>	Up to ±4% change from base, dependent on system.	Widants	(QD Hub compatible—see second page)
		Barrel Length	No restrictions
Materials	3D-Printed Grade 5 Titanium Core; 17-4 Heat Treated Stainless Steel Housing	Durability	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
Coating	Black Nitride QPQ	Maintenance	Detailed cleaning should be performed every 2,500 rounds.

#### **WARRANTY INFORMATION**

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit www.huxwrx.com/warranty.

\*Without mount

# VENTUM 762 RIFLE



## **APPROVED MOUNTS**



**RUGGED** UNIVERSAL MOUNT (RUM)

**HUXWRX** HUB-QD



**Q** PLAN-B



**DEAD AIR XENO** 



**SILENCERCO** ASR BRAVO



**DEAD AIR KEYMO** 

**HUXWRX.COM**