


# VENTUM 762


RIFLE

**HUXWRX**  
SAFETY CO.

## HUB COMPATIBLE FLOW-THROUGH®

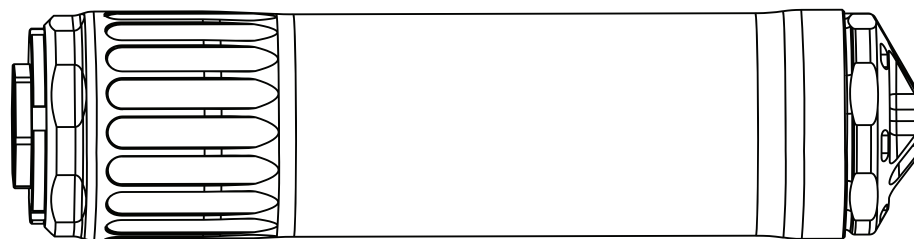

6.7in / 17.0cm  
6.94in / 17.6cm with included direct thread adapter



1.8in  
4.6cm

Length added to barrel:  
6.36in / 16.2cm with  
included direct thread adapter

### PRODUCT SPECIFICATIONS

<b>WEIGHT</b>	14.5oz / 411g – 16.3oz / 462g with included direct thread adapter
<b>CALIBER</b>	5.56, 6.5, 7.62, .308, 6mm, 7mm, 300 WM, 300 PRC, 30-06
<b>MATERIALS</b>	Suppressor: 3D-printed Grade 5 Titanium core and 17-4 Heat Treated Stainless Steel housing Direct thread adapter: 17-4 Heat Treated Stainless Steel
<b>COATINGS</b>	Suppressor: Black Nitride QPQ Direct thread adapter: Black Nitride QPQ
<b>TECHNOLOGY READINESS</b>	TR Level 9 Fully developed, in production.
<b>MOUNTS</b>	Ships with 5/8x24 direct thread adapter; QD Hub compatible—see second page
<b>BARREL LENGTH</b>	No restrictions
<b>DURABILITY</b>	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
<b>MAINTENANCE</b>	Detailed cleaning should be performed every 2,500 rounds.

### WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit [www.huxwrx.com/warranty](http://www.huxwrx.com/warranty).

# VENTUM 762

RIFLE



## APPROVED MOUNTS



HUXWRX HUB-QD



Q PLAN-B



SILENCERCO ASR BRAVO



RUGGED UNIVERSAL MOUNT (RUM)



DEAD AIR XENO



DEAD AIR KEYMO