


# VENTUM 762

RIFLE

**HUXWRX**  
SAFETY CO.

## HUB COMPATIBLE FLOW-THROUGH®

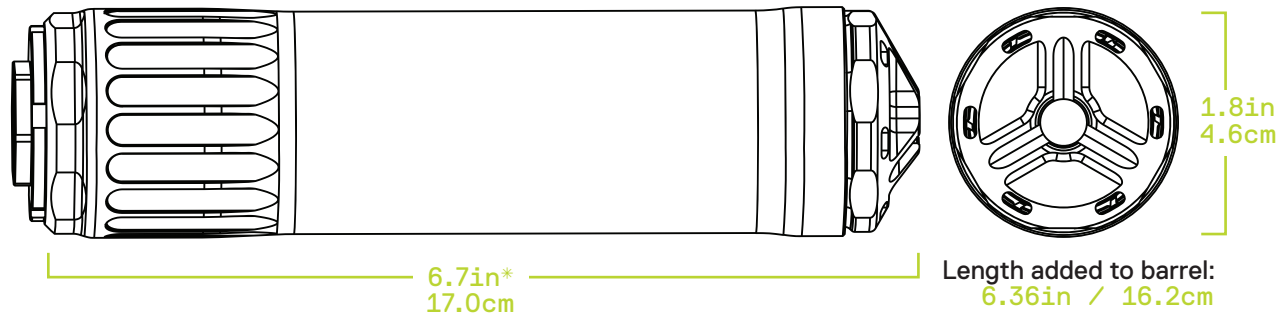

### PRODUCT SPECIFICATIONS

<b>Weight</b>	14.5oz / 411g*	<b>Technology Readiness</b>	TR Level 9 Fully developed, in production.
<b>Caliber</b>	5.56, 6.5, 7.62, .308, 6mm, 7mm, 300 WM, 300 PRC, 30-06	<b>Mounts</b>	Direct thread 5/8 x 28 (QD Hub compatible—see second page)
<b>Bolt Velocity</b>	Up to ±4% change from base, dependent on system.	<b>Barrel Length</b>	No restrictions
<b>Materials</b>	3D-Printed Grade 5 Titanium Core; 17-4 Heat Treated Stainless Steel Housing	<b>Durability</b>	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
<b>Coating</b>	Black Nitride QPQ	<b>Maintenance</b>	Detailed cleaning should be performed every 2,500 rounds.

### WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit [www.huxwrx.com/warranty](http://www.huxwrx.com/warranty).

\*Without mount

HUXWRX.COM


# VENTUM 762

RIFLE

## APPROVED MOUNTS



**HUXWRX HUB-QD**

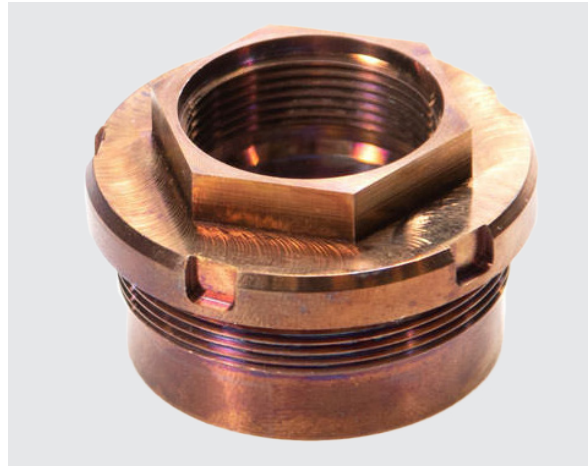

**Q PLAN-B**



**SILENCERCO ASR BRAVO**



**RUGGED UNIVERSAL MOUNT (RUM)**



**DEAD AIR XENO**



**DEAD AIR KEYMO**